

# WELDAS<sup>®</sup> *The Professional's Choice*



2013 / 2014

*Europe Catalog No. 0913*



## WELCOME TO THE WELDAS EUROPE CATALOG !

This catalogue wants to inform you about the Weldas products which are manufactured in our own, by TÜV, ISO certified factory. Most of the products are also CE certified, again by TÜV, and you find the information with the products including the numbers of the certificates, copies of these certificates are always at your disposal: [www.weldas-ce.com](http://www.weldas-ce.com). The pH, CHROMIUM (VI) and PCP levels of all materials in Weldas products have been tested and meet CE health standards. Colouring is done by natural materials. Please visit for more information our website: [www.weldas.com](http://www.weldas.com).



## WILKOMMEN IM WELDAS EUROPE KATALOG !

Dieser Katalog informiert Sie über die Weldas Produkte, die in unserem, vom TÜV, ISO zertifiziertem Werk, hergestellt werden. Die meisten Weldas Produkte sind vom TÜV nach den CE-Richtlinien zertifiziert. Die Nummern der Zertifikate entnehmen Sie bitte der Produktbeschreibung. Kopien sind selbstverständlich jederzeit zu erhalten: [www.weldas-ce.com](http://www.weldas-ce.com). Die pH-, Chromium-(VI) und PCP-Werte aller Weldas Materialien sind nach den CE Gesundheitsstandards getestet. Zur Materialfärbung werden nur natürliche Farben verwendet. Bitte besuchen Sie auch unsere Homepage: [www.weldas.com](http://www.weldas.com).



## BIENVENUE DANS LE CATALOGUE WELDAS !

Ce catalogue a pour but de vous informer sur les produits Weldas, fabriqués dans notre propre usine et certifiés ISO par TÜV. La plupart de nos produits sont aussi certifiés CE pas TÜV. Vous trouverez ces information avec le produits, y compris les numéros des certificats, les copies de ces certificats sont toujours à votre disposition: [www.weldas-ce.com](http://www.weldas-ce.com). Les niveaux de pH, Chrome (VI) et de PCP sont testés sur chaque produit Weldas et sont conformes aux standards de la santé CE. Les couleurs proviennent de matériaux naturels. Vous pouvez aussi visiter notre site: [www.weldas.com](http://www.weldas.com).



## WELKOM IN DE WELDAS EUROPE CATALOGUS !

Deze catalogus wil u informeren over de Weldas producten gefabriceerd in onze eigen, door TÜV, ISO gecertificeerde fabriek. De meeste van onze producten zijn CE gecertificeerd, door TÜV. De informatie hierover vindt u terug bij de producten, inclusief de nummers van de certificaten. Kopieën van deze certificaten zijn ten alle tijden bij ons verkrijgbaar: [www.weldas-ce.com](http://www.weldas-ce.com). De pH, CHROMIUM (VI) en PCP waarden van alle materialen in de Weldas producten zijn getest en voldoen aan de CE standaards. Verven van de producten gebeurt met natuurlijke materialen. Bezoek voor meer informatie onze website: [www.weldas.com](http://www.weldas.com).



## BEM-VINDO AO CATÁLOGO EUROPEU DA WELDAS!

Este catálogo contem informações sobre os produtos Weldas produzidos na nossa própria fábrica, a qual possui certificação TÜV e ISO. A maior parte dos nossos produtos são também certificados pela CE e TÜV. Encontrará essa informação junto aos produtos. O número das certificações, assim como as cópias das mesmas estarão sempre à sua disposição: [www.weldas-ce.com](http://www.weldas-ce.com). Os níveis de PH, Crômio e PFC de todos os materiais dos produtos Weldas foram submetidos a teste e obedecem às normas de saúde da CE. A coloração é feita através de substâncias naturais. Convidamo-lo a visitar o nosso site, onde poderá obter mais informações: [www.weldas.com](http://www.weldas.com).



## BIENVENIDO AL CATALOGO DE WELDAS EUROPE !

Este catalogo les ayudara informales sobre los productos de Weldas. Los productos son confeccionado bajo las normas de TÜV y llevan certificado ISO. La mayoría de los productos llevan también el certificado CE, impreso en los mismos productos Weldas. También les podemos facilitar copias de los certificados: [www.weldas-ce.com](http://www.weldas-ce.com). El pH, cromo y el nivel de PCP han sido ensayado y son conforme con los estándar CE de salud. El tenido de la piel se hace con materiales naturales. Por favor visiten nuestra pagina web: [www.weldas.com](http://www.weldas.com).



## BENVENUTI NEL CATALOGO WELDAS EUROPA !

Questo catalogo è stato concepito per informare su quanto la WELDAS produce in proprio attraverso un'azienda certificata ISO dal TUV. La maggior parte dei prodotti sono anche certificati CE, sempre dal TUV, e le copie di questi certificati sono comunque a vostra disposizione: [www.weldas-ce.com](http://www.weldas-ce.com). Il PH, il cromo (VI) ed i livelli PCP di tutti i materiali nei prodotti Weldas sono stati testati ed incontrano gli standard CE. La colorazione viene effettuata utilizzando solo sostanze naturali. Potete visitare il nostro sito all'indirizzo: [www.weldas.com](http://www.weldas.com).



## WITAMY W KATALOGU WELDAS EUROPE !

W niniejszym katalogu chcemy przedstawić Państwu produkty Weldas produkowane w naszej fabryce, certyfikowanej przez TÜV oraz spełniającej normy ISO. Większość naszych produktów jest również przetestowana przez TÜV i posiada niezbędne certyfikaty CE, które są zawsze do Państwa dyspozycji i o których więcej możecie Państwo przeczytać przy poszczególnych produktach: [www.weldas-ce.com](http://www.weldas-ce.com). Materiały używane do produkcji są regularnie testowane i spełniają wszelkie wymagania CE dla poziomów PH, chromu VI oraz PCP, a ich barwienie następuje przy użyciu naturalnych barwników. Po więcej informacji zapraszamy na naszą stronę: [www.weldas.com](http://www.weldas.com).



## VÄLKOMMEN TILL WELDAS EUROPE'S KATALOG!

Med denna katalog vill vi informera er om Weldas' produkter, som är tillverkade i vår egen, av TÜV, ISO certifierade fabrik. De flesta av våra produkter är även CE certifierade, också av TÜV, och du kan hitta den informationen tillsammans med produkterna, inkluderande antalet certifikat. Kopior av certifikaten finns alltid tillgängliga för er: [www.weldas-ce.com](http://www.weldas-ce.com). pH-värdet, Krom (VI), och PCP halterna för alla material i Weldas' produkter har testats, och möter CE's hälsostandard. Färgning är gjord med naturmaterial. Besök gärna vår hemsida [www.weldas.com](http://www.weldas.com) för mer information!



## VELKOMMEN TIL WELDAS EUROPA'S KATALOG !

Med dette katalog vil vi informere om Weldas produkterne, som er fremstillet på vores egen fabrik, der er TÜV og ISO certificeret. Mange af produkterne er også CE certificeret, også af TÜV. Herudover er der informationer om produkterne, antal certifikater som ligger på vores hjemmeside til fri download: [www.weldas-ce.com](http://www.weldas-ce.com). Ph, Crom6 og formaldehyd grænserne på alle Weldas produkter er testet og overholder EU standard. Indfarvning er udført med naturprodukter. Ønskes flere informationer, kan disse findes på: [www.weldas.com](http://www.weldas.com).



## VELKOMMEN TIL WELDAS EUROPA KATALOGEN !

Denne katalogen vil informere deg om Weldas produktene som er produsert i vår egen, by TÜV, ISO sertifiserte fabrikk. De fleste produktene er også CE sertifiserte, igjen av TÜV, og du vil finne informasjon inkludert nummrene på sertifikatene, kopier av disse sertifikatene er alltid tilgjengelige: [www.weldas-ce.com](http://www.weldas-ce.com). PH, CHROMIUM(VI) og PCP nivåene i alle Weldas produktene har blitt testet og imøteser CE helsestandarden. Fargingen er gjort med naturlige materialer. For mer informasjon besøk vår hjemmeside: [www.weldas.com](http://www.weldas.com).



## TERVETUOLOA TARKASTELEMAAN WELDAS EUROPEEN LUETTELOA!

Tämä luettelo haluaa antaa tietoja Weldasin tuotteista, jotka on valmistettu omassa TÜV- ja ISO-sertifioidussa tehtaassamme. Suurimmalla osalla tuotteista on myös TÜV:n myöntämä CE-sertifikaatti. Löydät nämä tiedot tuotteiden kohdalta yhdessä sertifikaatin numeron kanssa. Voit halutessasi saada kopiot sertifikaateista: [www.weldas-ce.com](http://www.weldas-ce.com). Kaikkien Weldasin tuotteissa käytettyjen materiaalien pH-, kromi(VI)- ja PCP-arvot on testattu, ja ne ovat CE-terveysstandardien mukaisia. Värjäys on tehty luonnollisilla aineilla. Enemmän tietoa löytyy verkkosivuiltamme : [www.weldas.com](http://www.weldas.com).

## TERE TULEMAST KOMPANII WELDAS EUROOPA KATALOOGI !

Käesoleva kataloogiga me soovime Teid informeerida Weldas toodetest. Weldas on TÜV-i liige, sellepärast kõik meie tehases valmistatud tooted sertifitseeritakse ISO-ga. Suurem osa toodangut omab samuti märki CE. Teie käsutuses on sertifikaatide loetelu ja koopiad koos toodetega: [www.weldas-ce.com](http://www.weldas-ce.com). Happesuse (pH), kroomi (IV) ja PCP tase Weldas toodetes on testitud ja vastab CE tervise standartile. Toodete värvimine on teostatud naturaalsete ainetega. Täpsema informatsiooni saamiseks, külastage meie web : [www.weldas.com](http://www.weldas.com).

## LAIPNI LŪGTI WELDAS EUROPE KĀLOGĀ !

Šajā katalogā vēlamies informēt par Weldas precēm, ražotām mūsu pašu rūpnīcā, kurai ir TUV un ISO sertifikāts. Vairumam preču ir arī TUV izsniegts CE sertifikāts, par kuru vajadzīgo informāciju jūs atradīsiet pie attiecīgajām precēm, ieskaitot sertifikātu numurus, šo sertifikātu kopijas vienmēr ir jūsu rīcībā: [www.weldas-ce.com](http://www.weldas-ce.com). pH, hroma (VI) un PCP līmenis visos Weldas precēs izmantotajos materiālos ir pārbaudīts un atbilst CE veselības standartiem. Krāsām ir izmantoti dabīgi materiāli. Lai iegūtu vairāk informācijas, lūdzu apmeklējiet mūsu mājas lapu: [www.weldas.com](http://www.weldas.com).

## SVEIKI ATVYKĖ Į WELDAS EUROPE KATALOGĄ!

Šiame kataloge norime jus informuoti apie Weldas produktus, kuriuos gaminame patys gamykloje turinčioje ISO sertifikata. Didesnė dauguma mūsų produkcijos turi EB tipo tyrimo sertifikatą. Visus sertifikatus ir informaciją apie produktus rasite mūsų internetiniame puslapyje: [www.weldas-ce.com](http://www.weldas-ce.com). Visi Weldas produktai yra patikrinti dėl PH lygio, chromo kiekio ir PCP ir atitinka visus EB keliamus sveikatos reikalavimus. Taip pat norime paminėti, kad visi mūsų produktai yra dažomi natūraliomis medžiagomis. Dėl platesnės informacijos apie mūsų produktus prašome apsilankyti mūsų internetiniame puslapyje: [www.weldas.com](http://www.weldas.com).

## Добро пожаловать в Европейский каталог компании Weldas!

В этом каталоге мы хотим представить Вам информацию о продукции Weldas. Weldas является членом TÜV, поэтому все изделия, производимые на нашем заводе, сертифицируются ISO. Большая часть продукции имеет также знак CE. Также в Вашем распоряжении вместе с продукцией перечень сертификатов и их копии: [www.weldas-ce.com](http://www.weldas-ce.com). Уровни pH, хрома (IV) и PCP материалов в продукции Weldas тестированы и соответствуют стандартам здоровья CE. Окраска изделий произведена натуральными веществами. Для получения более подробной информации посетите наш сайт: [www.weldas.com](http://www.weldas.com).

## VÍTEJTE NA STRÁNKÁCH WELDAS EUROPE KATALOGU !

Tento katalog má za cíl vás informovat o produktech Weldas, které jsou vyráběny v naší vlastní, TÜV a ISO certifikované továrně. Většina produktů je nejen podle CE (evropských norem) certifikována, ale rovněž také zkoušena TÜV a informace o tom naleznete pod číslem certifikátu na výrobku. Kopie certifikátů jsou vám vždy k dispozici: [www.weldas-ce.com](http://www.weldas-ce.com). Hodnoty pH, Chromu (VI) a výkonostní stupně všech používaných materiálů firmou Weldas byly testovány a vyhovují CE evropským zdravotním normám. Barvení je provedeno přírodními materiály. Prosim, pro více informací navštivte naše webové stránky: [www.weldas.com](http://www.weldas.com).

## VITAJTE V KATALÓGU WELDAS EUROPE !

Tento katalog by Vás rád informoval o produktech Weldas, ktoré sú vyrábané v našej vlastnej továrni, certifikovanej podľa noriem TÜV a ISO. Väčšina týchto produktov je takisto certifikovaná podľa noriem CE, a tiež podľa noriem TÜV. V katalogu nájdete pri produktoch informácie ohľadom počtu certifikátov. Kópie týchto certifikátov budete mať neustále k dispozícii: [www.weldas-ce.com](http://www.weldas-ce.com). Hodnoty pH, chrómu a PCP všetkých materiálov v produktoch Weldas sú testované a vyhovujú európskym zdravotným normám CE. Zafarbenie produktov je realizované farbivami z prírodných materiáloch. Prosim navštívte našu webovú stránku: [www.weldas.com](http://www.weldas.com), kde získate viac informácií.

## KÖSZÖNTI ÖNTA WELDAS EURÓPA CATALOG !

Ez a katalógus a Weldas termékekről nyújt Önnek információit, melyek a saját, TÜV illve ISO minősítéssel rendelkező gyárunkban készültek. A termékeink többsége CE tanúsítvánnyal illetve TÜV bevizsgálással rendelkezik. A tanúsítvány számára vonatkozó hivatkozást a termékek nálálja, és ezen tanúsítványok másolata mindenkor az Ön rendelkezésére áll: [www.weldas-ce.com](http://www.weldas-ce.com). A Weldas termékek anyagainak pH, Chromium (VI) és PCP szintjeit mindenkor ellenőrzik, melyek a CE egészségügyi standard előírásainak megfelelnek. A termékek színezése csak természetes anyagokkal történik. Kérjük további információért keresse fel honlapunkat: [www.weldas.com](http://www.weldas.com).

## BINE AȚI VENIT LA CATALOGUL WELDAS EUROPE!

Acest catalog vă informează despre produsele Weldas, care sunt fabricate în fabrici proprii, certificate TUV sau ISO. Majoritatea produselor sunt atestate CE, de asemenea și TUV și puteți găsi toate informațiile despre produse, incluzând numărul certificatelor, copii ale acestora sunt la dispoziția dumneavoastră: [www.weldas-ce.com](http://www.weldas-ce.com). Nivelul pH, Crom (VI) și PCP pentru toate materialele produselor Weldas au fost testate și îndeplinesc standardele de sănătate CE. Vopsirea se realizează cu materiale naturale. Pentru informații suplimentare vă rugăm să vizitați website-ul nostru: [www.weldas.com](http://www.weldas.com).

## ДОБРЕ ДОШЛИ НА СТРАНИЦИТЕ НА КАТАЛОГА НА WELDAS!

Този каталог има за цел да ви информира за продуктите, предлагани от Weldas и произведени в сертифицираната по ISO и TÜV фабрика на Weldas. Повечето от продуктите имат CE маркировка и сертификати, издадени от TÜV. Информация за номерата на сертификатите и самите сертификати са винаги на разположение на клиентите: [www.weldas-ce.com](http://www.weldas-ce.com). Стойността на pH, съдържанието на хром (VI) и PCP нивото на всички материали, от които се произвеждат продуктите на Weldas съответстват на CE здравните изисквания. Естествени материали се използват при багренето на продуктите. За повече информация посетете: [www.weldas.com](http://www.weldas.com).

## DOBRODOŠLI V EVROPSKEM KATALOGU WELDAS !

S tem katalogom Vas želimo obvestiti o izdelkih Weldas iz naše lastne TÜV in ISO certificirane proizvodnje. Večina naših izdelkov ima CE certifikat (prav tako izdan s strani TÜV), kar je ob izdelkih označeno s številko certifikata, kopije certifikatov pa so vam vedno na voljo: [www.weldas-ce.com](http://www.weldas-ce.com). Vrednosti pH, heksavalantnega kroma in PCP v materialih, ki jih uporablja Weldas, so preverjene in ustrezajo standardom EN. Za barvanje uporabljamo le naravne materiale. Vabimo Vas, da obiščete našo spletno stran: [www.weldas.com](http://www.weldas.com).

## DOBRODOŠLI U EUROPSKI WELDAS-ov KATALOG !

Ovaj katalog Vas želi informirati o Weldasovim proizvodima koji su proizvedeni u našoj vlastitoj tvornici, koja ujedno posjeduje i ISO certifikat izdan od strane TUV certifikacijske kuće. Velika većina naših proizvoda certificirana je i ima CE oznaku, izdanu od TUV-a. Uvijek možete saznati sve informacije o proizvodima uključujući i broj certifikata. Isto tako kopije ovih certifikata u svakom trenutku dostupne su vam preko naše web stranice: [www.weldas-ce.com](http://www.weldas-ce.com). pH, krom (VI) i PCP razine svih Weldasovih proizvoda permanentno se provjeravaju i testiraju, te zadovoljavaju sve CE zdravstvene standarde. Bojanje se vrši prirodnim materijalima. Za više informacija molim Vas posjetite našu web stranicu: [www.weldas.com](http://www.weldas.com).

## DOBRODOŠLI U WELDASOV KATALOG ZA EVROPU!

Katalog vam pruža informacije o Weldasovim proizvodima, proizvedenim u našoj TÜV i ISO sertifikovanoj fabrici. Večina proizvoda poseduje CE certifikat izdat od strane TÜV - a, takođe u katalogu možete pronaći informacije o broju sertifikata za svaki proizvod, kopije istih su vam uvek na raspolaganju: [www.weldas-ce.com](http://www.weldas-ce.com). PH, CHROMIUM (VI) i PCP nivoi svih materijala korišćenih u Weldasovim proizvodima su testirani i u skladu sa CE zdravstvenim standardima. Za bojenje proizvoda su korišćeni prirodni materijali. Za više informacija posetite našu internet prezentaciju na: [www.weldas.com](http://www.weldas.com).

## COMFOflex® WELDING GLOVES




Cotton lining



Foam lining



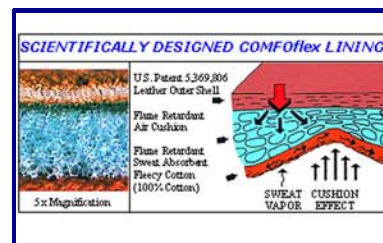


COMFOflex® lining




COMFOflex®

### 10-2000




	S, L, XL, XXL LH		35 cm.
	L/18"		46 cm. (L/18")

- A-grade cow split leather
- Hand COMFOflex® lined
- Cuff cotton lined
- Wide body model
- Size L also available in Left Hand only pairs (LH) and 18" (46 cm.)

 95% KEVLAR® 4 ply + 5 ply

CE COMFOflex®



EN 12477 (09.2005) TYPE A  
TÜV BP 60017622 0001  
TÜV 21128415 002




Ω ELECTROSTATIC TESTED Ω

### 10-2178




	L		35 cm.
---	---	---	--------

- Same features like the 10-2000 glove
- One finger model

 95% KEVLAR® 4 ply

CE COMFOflex®

EN 12477 (09.2005) TYPE A  
TÜV BP 60017622 0001  
TÜV 21128415 002



### 10-2000CF



	L, XL		35 cm.
---	-------	---	--------


- A-grade cow split leather
- Hand COMFOflex® lined
- Cuff cotton lined
- Wide body model
- **NO CHROMIUM USED DURING TANNING**

 95% KEVLAR® 4 ply + 5 ply

**CHROMIUM < 2 mg./kg.**

CE COMFOflex®

EN 12477 (09.2005) TYPE A  
TÜV BP 60017622 0001  
TÜV 21128415 002



## COMFOflex® WELDING GLOVES

10-2087



L, XL



35 cm.

- A-grade cow shoulder split leather
- Hand full COMFOflex® lined
- Cuff cotton lined
- Wide body model



95%

KEVLAR® 3 ply




EN 12477 (09.2005) TYPE A/B  
TÜV BP 60017622 0001  
TÜV 21128415 002



413X3X



4133



www.weldas.com

Ω ELECTROSTATIC TESTED Ω

10-2900



L, XL



36 cm.


- A-grade cow split leather
- Hand COMFOflex® and wool lined
- Cuff flame retardant lined
- Wide body model



70%

250°C CONTACT

KEVLAR® 4 ply



EN 12477 (09.2005) TYPE A  
TÜV BP 60017622 0001  
TÜV 21128415 002



423X4X



4233



www.weldas.com

10-2655



M, L, XL, XXL



37 cm.

- Hand bison leather
- Cuff split cowhide
- Inner back of the hand COMFOflex® lined
- Cuff flame retardant lined
- **CHROMIUM < 2 mg./kg.**



30%

250°C CONTACT

KEVLAR® 3 ply + 4 ply + 5 ply



EN 12477 (09.2005) TYPE A/B  
TÜV BP 21146065 001  
TÜV 556-10-0071/01



423X4X



4144



www.weldas.com

10-2850



L, XL



36 cm.

- Grain and split deerskin
- Backhand COMFOflex® lined and inner cuff flame retardant lined
- Highest comfort level



30%

KEVLAR® 4 ply



EN 12477 (09.2005) TYPE A/B  
TÜV BP 60017622 0001  
TÜV 21128415 002



313X4X



3133



www.weldas.com

## COMFOflex® WELDING GLOVES

10-2750



L, XL, XXL



36 cm.

- A-grade cow grain leather
- Backhand **COMFOflex®** lined and cuff cotton lined
- Back palm reversed grain (suède)
- Oil and weather resistant
- Excellent quality and comfortable to wear



30%


**250°C CONTACT**

KEVLAR® 4 ply



**CE STEERSOtuff®**

EN 12477 (09.2005) TYPE A/B  
TÜV BP 60017622 0001  
TÜV 21128415 002



Ω ELECTROSTATIC TESTED Ω

10-2755



L, XL



36 cm.

- Combined features:
- on the back of our 10-2385
- and the innerhand of the 10-2750 with extra comfort padges
- Oil and weather resistant
- Excellent quality and comfortable to wear



30%


**350°C CONTACT**

KEVLAR® 4 ply



**CE COMFOflex®**

EN 12477 (09.2005) TYPE A/B  
TÜV BP 60022511 0001  
TÜV 21136762 003



10-2385



L, XL, XXL



35 cm.

- A-grade cow side split leather
- Hand full **COMFOflex®** lined and cuff full flame retardant lined
- Wide body model
- Aluminized back is designed to reflect radiant heat and has a layer of split deerskin in between the back and **COMFOflex®** lining




35%

KEVLAR® 4 ply



**CE COMFOflex®**

EN 12477 (09.2005) TYPE A  
TÜV BP 60017622 0001  
TÜV 21128415 002



+



=



44-3006LB, 44-3008LB, 44-3009BF:  
see page 32


## COTTON LINED WELDING GLOVES

### 10-2392



L, XL  
LH/L, LH/XL

L/18"



34 cm.



46 cm. (L/18)

- Cow shoulder split leather
- Full cotton lined
- Straight thumb helps the user to handle a mig gun a lot better
- Size L also available in 18" (46 cm.)
- Size L and XL also available in Left Hand only pairs (LH)




95%

KEVLAR® 3 ply



CE

EN 12477 (09.2005) TYPE A/B  
TÜV BP 60017622.0002  
TÜV 21128415 002



413X4X

3124

www.weldas.com

### 10-2392 MIT



L



34 cm.

- One finger model of glove 10-2392
- Cow shoulder split leather
- Full cotton lined




95%

KEVLAR® 3 ply



CE

EN 12477 (09.2005) TYPE A/B  
TÜV BP 60017622.0002  
TÜV 21128415 002



413X4X

3124

www.weldas.com

### 10-2392GB



L, XL



34 cm.

- Same as glove 10-2392, but *Golden Brown™* model
- Cow shoulder split leather
- Full cotton lined
- Straight thumb helps the user to handle a mig gun a lot better




95%

KEVLAR® 3 ply



CE

EN 12477 (09.2005) TYPE A/B  
TÜV BP 60017622.0002  
TÜV 21128415 002



413X4X

3124

www.weldas.com

### 10-2150



L, XL



36 cm.

- Innerhand is made of cow grain leather to make it oil and weather resistant
- All other parts of the glove are made of cow split leather
- Full cotton lined




95%

**250°C CONTACT**

CE

EN 12477 (09.2005) TYPE A/B  
TÜV BP 60022511.0001  
TÜV 21136762.003



423X4X

2122

www.weldas.com



## COTTON LINED WELDING GLOVES

### 10-2101



L, XL



34 cm.

- The 10-2101 is our general purpose glove of the range
- Cow shoulder split leather
- Full cotton lined



90%

CE


EN 12477 (09.2005) TYPE A/B  
TÜV BP 60017622 0003  
TÜV 21128415 002



413X4X



3134



www.weldas.com

### 10-2101GB



L, XL



34 cm.

- Same as glove 10-2101, but *Golden Brown™* model
- Cow shoulder split leather
- Full cotton lined



90%

CE

EN 12477 (09.2005) TYPE A/B  
TÜV BP 60017622 0003  
TÜV 21128415 002



413X4X



3134



www.weldas.com

Weldas sizing incorporates EN420 size standards, the lining and the intended use

(EN420)

#### GLOVE AND HAND SIZE REFERENCE

Hand Size Index	7½	8½	9	9½	10½
Weldas Size Label	S	M	L	XL	XXL
Measurement mm	190	216	229	241	267



[WWW.WELDAS-CE.COM](http://WWW.WELDAS-CE.COM)

## SOFTouch™ TIG WELDING GLOVES



**Weldas SOFTouch™ TIG gloves:  
10-1003, 10-1005, 10-1009 and 10-1050  
have seamless index finger for better feed of TIG wires!**

### 10-1003



M, L, XL, XXL



35 cm.

- Oil and abrasion resistant
- Reversed (suède) grain pig leather
- Seamless index finger

KEVLAR® 3 ply



SOFTouch™

EN 12477 (09.2005) TYPE A/B  
TÜV BP 60017622 0003  
TÜV 21128415 002



### 10-1005



S, M, L, XL, XXL



35 cm.


- Very smooth and pliable
- Calfskin grain leather
- Seamless index finger

KEVLAR® 3 ply



SOFTouch™

EN 12477 (09.2005) TYPE A/B  
TÜV BP 60017622 0003  
TÜV 21128415 002



Ω ELECTROSTATIC TESTED Ω

### 10-1007



M, L, XL



35 cm.

- Goatskin palm
- A-grade cow split leather back and cuff

KEVLAR® 3 ply



SOFTouch™

EN 12477 (09.2005) TYPE B  
TÜV BP 60017622 0003  
TÜV 21128415 002



**SOFTouch™**

## TIG WELDING GLOVES

**10-1009**



M, L, XL, XXL



35 cm.

- Hand made of goatskin
- Very soft and excellent feeling
- Cuff made of split cow leather
- Seamless index finger

KEVLAR® 3 ply



**SOFTouch™**

EN 12477 (09.2005) TYPE B  
TÜV BP 60017622 0004  
TÜV 21128415 002



412X4X



2111



www.weldas.com

Ω ELECTROSTATIC TESTED Ω

**10-1050**



M, L, XL, XXL



32 cm.

- Outer hand made of soft black grain cow leather
- White grain goat leather spacers on the sides of the fingers
- Curved cuff made of supple split cow leather, trimmed at the edge with white grain goat leather
- Thin fleecy, flame retardant lining at the back of the hand
- Seamless index finger

KEVLAR® 3 ply



**SOFTouch™**

EN 12477 (2001 + A1 : 2005)  
TYPE A/B  
TÜV BP 60042511 0001  
TÜV 21177510 001



412X4X



2142



www.weldas.com

**10-2304**



M, L, XL, XXL



32 cm.

- Hand made of deerskin
- Very soft feeling
- Cuff made of split cow leather

KEVLAR® 3 ply



**DEERSOsoft®**


EN 12477 (09.2005) TYPE A/B  
TÜV BP 60017622 0004  
TÜV 21128415 002



413X4X



2133



www.weldas.com

**10-2644**



M, L, XL, XXL



32 cm.

- Hand bison leather
- Cuff split cowhide
- **CHROMIUM < 2 mg./kg.**



KEVLAR® 2 ply + 3 ply



**ThunderingBison™**


EN 12477 (09.2005) TYPE A/B  
TÜV BP 21146065 001  
TÜV 556-10-0071/01



412X4X



2143



www.weldas.com

## WORKING GLOVES

**10-2660**



L, XL



23 cm.

- Work glove designed for general purpose applications
- Grain pig leather with stretchy spandex glove back
- Wrist closable with a hook and loop closure for good fit of the glove

CE minimal risk



According to 89/686/EEC:  
not to be used in an  
industrial environment

**10-2670**



M, L, XL, XXL



23 cm.

- Work glove designed for general purpose applications
- Grain goat leather with stretchy spandex glove back
- Wrist closable with a hook and loop closure for good fit of the glove

CE minimal risk



According to 89/686/EEC:  
not to be used in an  
industrial environment

**10-2680**



L, XL



23 cm.

- Work glove designed for general purpose applications
- Grain cow leather with stretchy spandex glove back
- Wrist closable with a hook and loop closure for good fit of the glove

CE minimal risk



According to 89/686/EEC  
not to be used in an  
industrial environment

[www.weldas.com](http://www.weldas.com)

## WORKING GLOVES

10-2806



L



25 cm.

- Cow split leather
- Double leather in the palm
- Cotton lined
- Rubberized safety cuff

CE

EN 388 (2003)  
TÜV BP 60017626 0001  
TÜV 21128304 002



10-2209



S, M, L, XL, XXL



26 cm.

- A-grade cow split leather
- Cotton lined
- Rubberized safety cuff

CE

EN 388 (2003)  
TÜV BP 60017626 0001  
TÜV 21128304 002



10-2209LB



L, XL




26 cm.

- A-grade cow split leather
- Cotton lined
- Rubberized safety cuff
- *Lava Brown™* model

CE

EN 388 (2003)  
TÜV BP 60017626 0001  
TÜV 21128304 002



10-2207



L, XL




25 cm.

- Cow split leather
- Cotton lined
- Safety cuff

CE

EN 388 (2003)  
TÜV BP 60017626 0001  
TÜV 21128304 002



## DRIVER GLOVES

10-2064



L, XL




24 cm.

- Durable split cow leather



EN 388 (2003)  
TÜV BP 60017626 0002  
TÜV 21128304 002



10-2336



M, L, XL




24 cm.

- Palm made of cow grain side leather  
- Back made of split cow leather



EN 388 (2003)  
TÜV BP 60017626 0002  
TÜV 21128304 002



10-2633



M, L, XL, XXL



25 cm.


- Innerhand made of grain bison leather  
- Back made of split cow leather  
- **CHROMIUM < 2 mg./kg.**



KEVLAR® 3 ply



EN 388 (2003)  
TÜV BP 21146066 001  
TÜV 556-10-0071/02



10-2700



S, M, L, XL, XXL




26 cm.

- Cow grain side leather of the highest quality  
- Oil and weather resistant



EN 388 (2003)  
TÜV BP 60017626 0002  
TÜV 21128304 002





*COMFOflex*®

*SOFTouch*™

*DEERSOsoft*®

*ThunderingBison*™

*TURMOflex*®

*Lava Brown*™

*STEERSOtuff*®

## WWW.WELDAS.COM



*Golden Brown*™

*Fire Fox*™

*Yellowjacket*®


*SWEATSOpad*®

*COMBOframe*™

*LAVAshield*®

*PYTHONrap*™

## Lava Brown™ CLOTHING

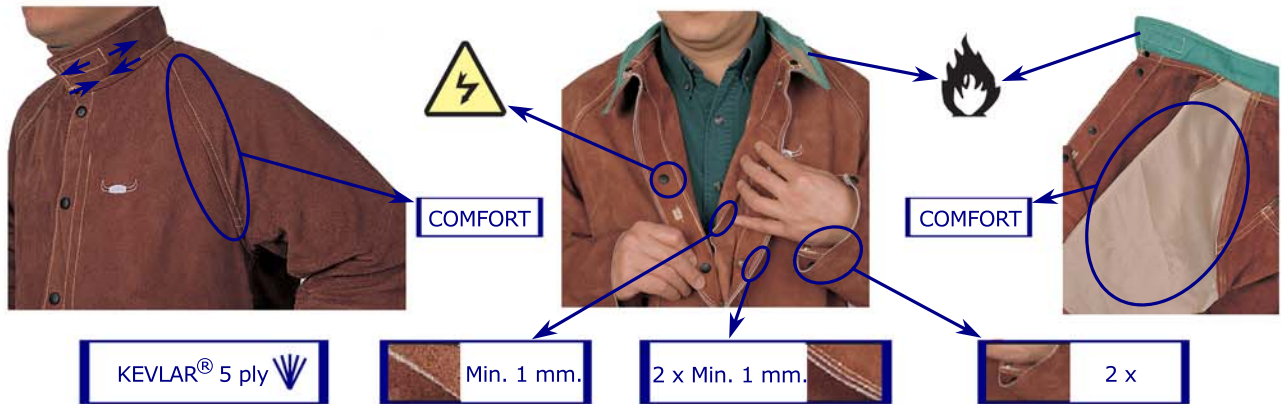

Lava Brown™ products are made of high quality A-grade side split cow leather

### 44-7300 Jacket full leather




- A-grade side split cow leather
- KEVLAR® 5 ply
- Leather thickness: min. 1 mm.

44-7300M	76 cm.	100 cm.
44-7300L	81 cm.	112 cm.
44-7300XL	86 cm.	124 cm.
44-7300XXL	91 cm.	136 cm.
44-7300XXXL	96 cm.	148 cm.
44-7300XXXXL	96 cm.	160 cm.



EN ISO 11611:2007  
CLASS 2/A1  
TÜV BP 60041277 0001  
TÜV 21173205 001



**EN ISO 11611:2007  
CLASS 2/A1**

### 44-7300/P Jacket with flame retardant back




- A-grade side split cow leather
- KEVLAR® 5 ply
- Leather thickness: min. 1 mm.
- Back: flame retardant cotton 315 gr/m<sup>2</sup>

44-7300M/P	76 cm.	100 cm.
44-7300L/P	81 cm.	112 cm.
44-7300XL/P	86 cm.	124 cm.
44-7300XXL/P	91 cm.	136 cm.
44-7300XXXL/P	96 cm.	148 cm.



EN ISO 11611:2007  
CLASS 2/A1  
TÜV BP 60041277 0001  
TÜV 21173205 001



**EN ISO 11611:2007  
CLASS 2/A1**



## Lava Brown™ CLOTHING

### 44-7800 Cape sleeve




- A-grade side split cow leather
- KEVLAR® 5 ply
- Leather thickness: min. 1 mm.

44-7800M	100 cm.
44-7800L	112 cm.
44-7800XL	124 cm.
44-7800XXL	136 cm.
44-7800XXXL	148 cm.



EN ISO 11611:2007  
CLASS 2/A1  
TÜV BP 60041277 0001  
TÜV 21173205 001



**EN ISO 11611:2007  
CLASS 2/A1**

### 44-78.. Apron for cape sleeves



- A-grade side split cow leather
- KEVLAR® 5 ply
- Leather thickness: min. 1 mm.

44-7820	51 cm.	60 cm.
44-7828	71 cm.	60 cm.
44-7836	91 cm.	60 cm.
44-7836XL	120 cm.	80 cm.



EN ISO 11611:2007  
CLASS 2/A1  
TÜV BP 60041277 0001  
TÜV 21173205 001



**EN ISO 11611:2007  
CLASS 2/A1**

### 44-71.. Aprons




- A-grade side split cow leather
- KEVLAR® 5 ply
- Leather thickness: min. 1 mm.
- Self-balancing strap system

44-7124	60 cm.	60 cm.
44-7136	91 cm.	60 cm.
44-7142	107 cm.	60 cm.
44-7142 W	107 cm.	80 cm.
44-7148	122 cm.	60 cm.
44-7148 W	122 cm.	80 cm.

COMFORT



EN ISO 11611:2007  
CLASS 2/A1  
TÜV BP 60041277 0001  
TÜV 21173205 001



**EN ISO 11611:2007  
CLASS 2/A1**

## Lava Brown™ CLOTHING

### 44-7248 Pants with breast protection and open back



122 cm.

- A-grade side split cow leather
- KEVLAR® 5 ply
- Leather thickness: min. 1 mm.




### 44-7440 Pants with open back



102 cm.



EN ISO 11611:2007  
CLASS 2/A1  
TÜV BP 60041277 0001  
TÜV 21173205 001



EN ISO 11611:2007  
CLASS 2/A1

### 44-7440/7600 Pants with closed back




- A-grade side split cow leather
- KEVLAR® 5 ply
- Leather thickness: min. 1 mm.

44-7440/7600M  
44-7440/7600L  
44-7440/7600XL  
44-7440/7600XXL  
44-7440/7600XXXL

110 cm.  
112 cm.  
116 cm.  
122 cm.  
128 cm.



EN ISO 11611:2007  
CLASS 2/A1  
TÜV BP 60041277 0001  
TÜV 21173205 001



EN ISO 11611:2007  
CLASS 2/A1

### 44-7440/7648 Pants with breast protection and closed back, bib and brace




- A-grade side split cow leather
- KEVLAR® 5 ply
- Leather thickness: min. 1 mm.

44-7440/7648M  
44-7440/7648L  
44-7440/7648XL  
44-7440/7648XXL  
44-7440/7648XXXL  
44-7440/7648XXXXL

136 cm.  
140 cm.  
144 cm.  
148 cm.  
152 cm.  
156 cm.



EN ISO 11611:2007  
CLASS 2/A1  
TÜV BP 60041277 0001  
TÜV 21173205 001



EN ISO 11611:2007  
CLASS 2/A1

Lava Brown™

## CLOTHING

### 44-7023 Sleeves




- A-grade side split cow leather
- KEVLAR® 5 ply
- Leather thickness: min. 1 mm.
- Balancing strap system

44-7023

58 cm.



EN ISO 11611:2007  
CLASS 2/A1  
TÜV BP 60041277 0001  
TÜV 21173205 001



EN ISO 11611:2007  
CLASS 2/A1

### 44-7106 Spats for shoe protection (15 cm.)




- A-grade side split cow leather
- KEVLAR® 5 ply
- Leather thickness: min. 1 mm.
- With under the shoe an elastic strap to secure shoe top cover

44-7106

33-43 cm. 15 cm.



EN ISO 11611:2007  
CLASS 2/A1  
TÜV BP 60041277 0001  
TÜV 21173205 001



EN ISO 11611:2007  
CLASS 2/A1

### 44-7114 Spats for leg and shoe protection (36 cm.)




- A-grade side split cow leather
- KEVLAR® 5 ply
- Leather thickness: min. 1 mm.
- With bendable insert at shin and shoe top to allow shape formation

44-7114

37-47 cm. 36 cm.



EN ISO 11611:2007  
CLASS 2/A1  
TÜV BP 60041277 0001  
TÜV 21173205 001



EN ISO 11611:2007  
CLASS 2/A1

### 44-7114EXT



15 cm. wide extension for 44-7114

44-7114EXT

15 cm.

44-7114EXT + 44-7114 = 52-62 cm.

## Golden Brown™ CLOTHING



KEVLAR® 3 ply



Min. 1 mm.

2 x Min. 1 mm.



1 x

**Golden Brown™ products are made of high quality side split or grain cow leather**  
 Golden Brown™ split leather products: pages 20, 21, 22, 23. Grain leather products: page 24.

### 44-2530 Jacket with flame retardant back




- Side split cow leather
- KEVLAR® 3 ply
- Leather thickness: min. 1 mm.
- Back: flame retardant cotton 315 gr./sq.m.

44-2530M  
 44-2530L  
 44-2530XL  
 44-2530XXL  
 44-2530XXXL

	↕	
76 cm.		100 cm.
81 cm.		112 cm.
86 cm.		124 cm.
91 cm.		136 cm.
96 cm.		148 cm.



EN ISO 11611:2007  
 CLASS 2/A1  
 TÜV BP 60079303 0001  
 TÜV 21190228 001



**EN ISO 11611:2007  
 CLASS 2/A1**

### 44-2847 Shoulder apron




- Side split cow leather
- KEVLAR® 3 ply
- Leather thickness: min. 1 mm.

44-2847L  
 44-2847XL

	↕	↔
92 cm.		58 cm.
92 cm.		63 cm.



EN ISO 11611:2007  
 CLASS 2/A1  
 TÜV BP 60079303 0001  
 TÜV 21190228 001



**EN ISO 11611:2007  
 CLASS 2/A1**

## Golden Brown™ CLOTHING

### 44-2800 Cape sleeve



- Side split cow leather
- KEVLAR® 3 ply
- Leather thickness: min. 1 mm.



44-2800L	112 cm.
44-2800XL	124 cm.
44-2800XXL	136 cm.



Golden Brown

EN ISO 11611:2007  
CLASS 2/A1  
TÜV BP 60079303 0001  
TÜV 21190228 001



EN ISO 11611:2007  
CLASS 2/A1

### 44-28.. Apron for cape sleeves




- Side split cow leather
- KEVLAR® 3 ply
- Leather thickness: min. 1 mm.

44-2828 44-2836	↕	↔
	71 cm. 91 cm.	55 cm. 55 cm.



Golden Brown

EN ISO 11611:2007  
CLASS 2/A1  
TÜV BP 60079315 0001  
TÜV 21190317 001



EN ISO 11611:2007  
CLASS 2/A1

### 44-21.. Aprons




- Side split cow leather
- KEVLAR® 3 ply
- Leather thickness: min. 1 mm.
- Self-balancing strap system

44-2136 44-2142 44-2142 W	↕	↔
	91 cm. 107 cm. 107 cm.	60 cm. 60 cm. 80 cm.



Golden Brown

EN ISO 11611:2007  
CLASS 2/A1  
TÜV BP 60079315 0001,  
TÜV BP 60079303 0001  
TÜV 21190228 001,  
TÜV 21190317 001



EN ISO 11611:2007  
CLASS 2/A1

## Golden Brown™ CLOTHING

### 44-2600 Pants



- Side split cow leather
- KEVLAR® 3 ply
- Leather thickness: min. 1 mm.

44-2600M  
44-2600L  
44-2600XL

110 cm.  
112 cm.  
116 cm.



Golden Brown

EN ISO 11611:2007  
CLASS 2/A1  
TÜV BP 60079303 0001  
TÜV 21190228 001



EN ISO 11611:2007  
CLASS 2/A1

### 44-2648 Pants with breast protection, bib and brace



- Side split cow leather
- KEVLAR® 3 ply
- Leather thickness: min. 1 mm.

44-2648M  
44-2648L  
44-2648XL  
44-2648XXL

136 cm.  
140 cm.  
144 cm.  
148 cm.



Golden Brown

EN ISO 11611:2007  
CLASS 2/A1  
TÜV BP 60079303 0001  
TÜV 21190228 001



EN ISO 11611:2007  
CLASS 2/A1

### 44-2321, 44-2321XL Sleeves



- Side split cow leather
- KEVLAR® 3 ply
- Leather thickness: min. 1 mm.
- Hook and loop closure at the top
- Wrist-end with elastic band included

44-2321  
44-2321XL

52 cm.  
52 cm.



21-31 cm.  
21-31 cm.

34-47 cm.  
45-60 cm.



Golden Brown

EN ISO 11611:2007  
CLASS 2/A1  
TÜV BP 60079313 0001  
TÜV 21190282 001



EN ISO 11611:2007  
CLASS 2/A1

## Golden Brown™ CLOTHING

### 44-2106 Spats for leg and shoe protection (15 cm.)



- Side split cow leather
- KEVLAR® 3 ply
- Leather thickness: min. 1 mm.
- With under the shoe an elastic strap to secure shoe top cover

44-2106

33-43 cm. 15 cm.

CE



Golden Brown

EN ISO 11611:2007  
CLASS 2/A1  
TÜV BP 60079315 0001  
TÜV 21190317 001



**EN ISO 11611:2007  
CLASS 2/A1**

### 44-2114 Spats for leg and shoe protection (36 cm.)



- Side split cow leather
- KEVLAR® 3 ply
- Leather thickness: min. 1 mm.
- With bendable insert at shin and shoe top to allow shape formation

44-2114

37-47 cm. 36 cm.

CE



Golden Brown


EN ISO 11611:2007  
CLASS 2/A1  
TÜV BP 60079315 0001  
TÜV 21190317 001



**EN ISO 11611:2007  
CLASS 2/A1**



## Golden Brown™ CLOTHING

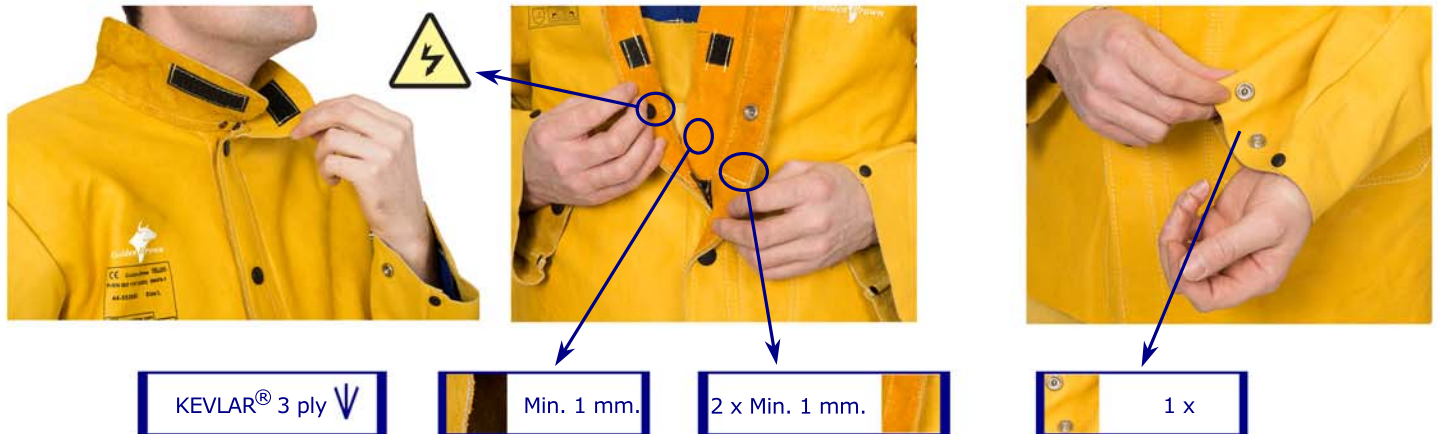

**Golden Brown™ products are made of high quality side split or grain cow leather**  
 Golden Brown™ split leather products: pages 20, 21, 22, 23. Grain leather products: page 24.

### 44-5530 Jacket full leather




- Grain cow leather
- KEVLAR® 3 ply
- Leather thickness: min. 1 mm.

44-5530L	81 cm.	112 cm.
44-5530XL	86 cm.	124 cm.
44-5530XXL	91 cm.	136 cm.
44-5530XXXL	96 cm.	148 cm.



EN ISO 11611:2007  
 CLASS 2/A1  
 TÜV BP 60079311 0001  
 TÜV 21190268 001



**EN ISO 11611:2007  
 CLASS 2/A1**

### 44-5600 Pants with breast protection, bib and brace




- Grain cow leather
- KEVLAR® 3 ply
- Leather thickness: min. 1 mm.

44-5600L	140 cm.
44-5600XL	144 cm.
44-5600XXL	148 cm.
44-5600XXXL	152 cm.



EN ISO 11611:2007  
 CLASS 2/A1  
 TÜV BP 60079311 0001  
 TÜV 21190268 001



**EN ISO 11611:2007  
 CLASS 2/A1**



## Yellowjacket® CLOTHING



KEVLAR® 3 ply



1 x

**Yellowjacket® product is made of 315 gr./m<sup>2</sup> flame retardant cotton body and split cow leather sleeves**

### 33-3060 Jacket, flame retardant cotton with leather sleeves



- 315 gr./m<sup>2</sup> flame retardant cotton body
- split cow leather sleeves
- KEVLAR® 3 ply

	↑↓	↑
33-3060S	76 cm.	108 cm.
33-3060M	76 cm.	116 cm.
33-3060L	81 cm.	127 cm.
33-3060XL	86 cm.	138 cm.
33-3060XXL	91 cm.	147 cm.
33-3060XXXL	96 cm.	158 cm.
33-3060XXXXL	96 cm.	168 cm.



**Yellowjacket®**


EN ISO 11611:2003  
CLASS 1  
TÜV BP 6008974  
TÜV 21114005 001




**EN ISO 11611:2003  
CLASS 1**



## Fire Fox™ CLOTHING

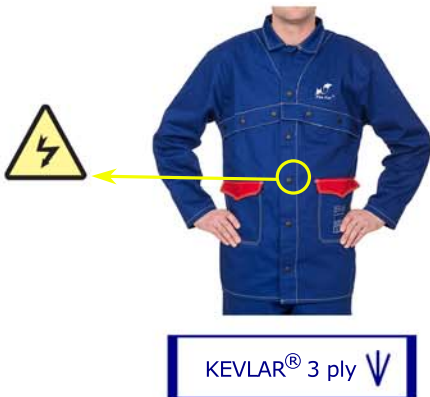

KEVLAR® 3 ply

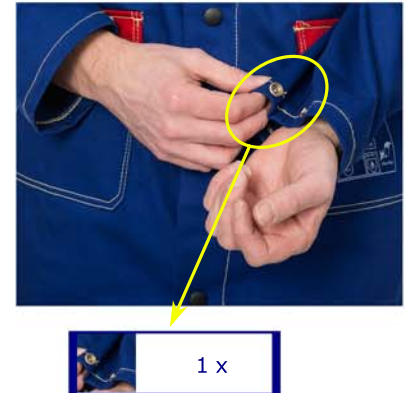

1 x

**Fire Fox™ clothing is made of 315 gr./m<sup>2</sup> flame retardant cotton**

### 33-2300 Jacket



44-7820  
44-7828  
44-7836  
44-7836XL  
(see page 17)

44-2828  
44-2836  
(see page 21)


- 315 gr./m<sup>2</sup> flame retardant cotton
- KEVLAR® 3 ply
- Possibility to add a *Lava Brown™* or *Golden Brown™* apron to this jacket
- 25 x (without apron)

33-2300M	76 cm.	102 cm.
33-2300L	81 cm.	111 cm.
33-2300XL	86 cm.	118 cm.
33-2300XXL	91 cm.	123 cm.
33-2300XXXL	96 cm.	126 cm.
33-2300XXXXL	96 cm.	132 cm.



Fire Fox

EN ISO 11611:2003  
CLASS 1  
TÜV BP 60008972  
TÜV 21114004 001



**EN ISO 11611:2003  
CLASS 1**

### 33-2600 Pants




- 315 gr./m<sup>2</sup> flame retardant cotton
- KEVLAR® 3 ply
- Possibility to add knee pads
- 25 x

33-2600M	76 cm.
33-2600L	76 cm.
33-2600XL	78 cm.
33-2600XXL	81 cm.
33-2600XXXL	82 cm.
33-2600XXXXL	83 cm.



Fire Fox

EN ISO 11611:2003  
CLASS 1  
TÜV BP 60008972  
TÜV 21114004 001



**EN ISO 11611:2003  
CLASS 1**

## Fire Fox™ CLOTHING

### 33-2700 Pants with breast protection, bib and brace



- 315 gr./m<sup>2</sup> flame retardant cotton
- KEVLAR® 3 ply
- Possibility to add knee pads
- 25 x




- 33-2700M
- 33-2700L
- 33-2700XL
- 33-2700XXL
- 33-2700XXXL
- 33-2700XXXXL



- 76 cm.
- 76 cm.
- 78 cm.
- 81 cm.
- 82 cm.
- 83 cm.



**Fire Fox**  
EN ISO 11611:2003  
CLASS 1  
TÜV BP 60008972  
TÜV 21114004 001



**EN ISO 11611:2003  
CLASS 1**

### 33-2800 Coverall



- 315 gr./m<sup>2</sup> flame retardant cotton
- KEVLAR® 3 ply
- Possibility to add knee pads
- 25 x



- 33-2800M
- 33-2800L
- 33-2800XL
- 33-2800XXL
- 33-2800XXXL
- 33-2800XXXXL



- 152 cm.
- 154 cm.
- 157 cm.
- 164 cm.
- 175 cm.
- 177 cm.




**Fire Fox**  
EN ISO 11611:2003  
CLASS 1  
TÜV BP 60008972  
TÜV 21114004 001



**EN ISO 11611:2003  
CLASS 1**

### 33-2320 Sleeves

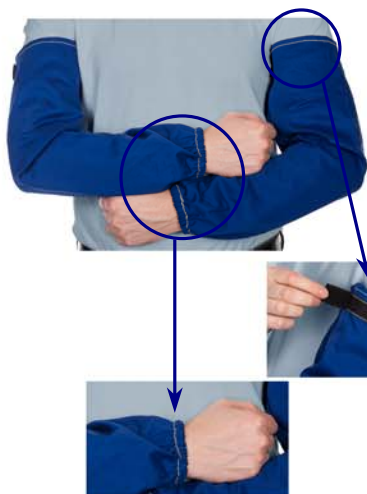

- 315 gr./m<sup>2</sup> flame retardant cotton
- KEVLAR® 3 ply
- 25 x



33-2320



52 cm.



19-32 cm.



36-47 cm.



**Fire Fox**  
EN ISO 11611:2003  
CLASS 1  
TÜV BP 60008972  
TÜV 21114004 001



**EN ISO 11611:2003  
CLASS 1**

*Fire Fox*™

**COTTON DOO-RAGS AND BEANIE**

**23-3601 Camouflage**



**23-3602 Wild**



**23-3604 USA flag**



**23-3606 Happy Hour**



**23-3607 Paradise**



**23-3609 European flag**



**23-8000 FR Beanie**



23-8000L 56-59 cm.  
23-8000XL 59-62 cm.



**FLAME RETARDANT COTTON DOO-RAGS**


**23-3612 FR Doo-Rag Blue**



**23-3613 FR Doo-Rag Orange**



EN ISO 11611:2003  
CLASS 1  
TÜV BP 60008973  
TÜV 21114006 001



**EN ISO 11611:2003  
CLASS 2**



25 x

**Fire Fox™ COTTON CAPS**

**23-\*503 Camouflage**



**23-\*507 USA flag**



**23-\*524 Wild**



**FLAME RETARDANT COTTON CAPS**

**23-\*514 FR Cap Orange**



**23-\*515 FR Cap Blue**



CE

EN ISO 11611:2003  
CLASS 1  
TÜV BP 60008973  
TÜV 21114006 001





**EN ISO 11611:2003  
CLASS 2**



25 x 

**Choose the best size:**

**\* = 1, 2, 3, 4, 5, 6, 7**

Size	Articlenumber	⌚
7	23- <b>1</b> xxx	22.0", 56 cm.
7 1/8	23- <b>2</b> xxx	22.4", 57 cm.
7 1/4	23- <b>3</b> xxx	22.8", 58 cm.
7 3/8	23- <b>4</b> xxx	23.2", 59 cm.
7 1/2	23- <b>5</b> xxx	23.6", 60 cm.
7 5/8	23- <b>6</b> xxx	23.9", 61 cm.
7 3/4	23- <b>7</b> xxx	24.0", 62 cm.



**COMFORT**



Fire Fox™

## HELMET HOODS

23-6680




23-6680/LV



23-6690



23-6680 / 23-6680LV / 23-6690: 64 cm.  
23-6680XL: 68 cm.  
23-6680 / 23-6680LV / 23-6690: 42 - 53 cm.  
23-6680XL: 52 - 65 cm.



23-6680: 41 cm.  
23-6690: 41 cm.  
23-6680XL: 44 cm.  
23-6680/LV: 62 cm.



Fire Fox

EN ISO 11611:2003  
CLASS 2  
TÜV BP 60008973  
TÜV 21114006 001



**EN ISO 11611:2003  
CLASS 2**



25 x

TURMOflex®

## WINTER HELMET LINERS

23-7701



23-7702




23-7733



23-7711




before  
washed



**SWEATSOpad®**

## HELMET COMFORTER

- Helmet pad and sweatband combined in one piece air cushioned *SWEATSOpad*®
- Flame retardant
- No more "helmet head"!
- No more slippage!
- No more sweat!

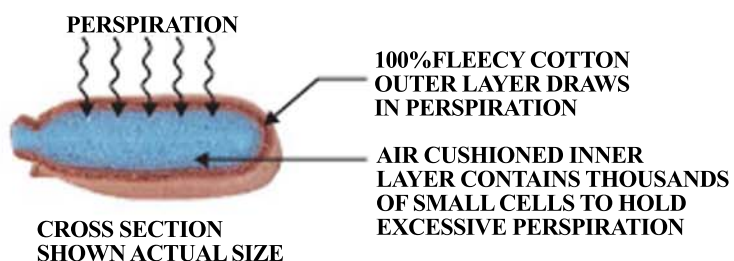

### 20-3100V + 20-3100V/17



**SWEATSOpad®**


5 x 

20-3100V  
20-3100V/17

↔  
22 cm.  
17 cm.

CE

EN ISO 11611:2003  
CLAUSE 6.6  
TÜV AK 60013119 0001  
TÜV 21120493 001



### 20-3200V



**SWEATSOpad®**

5 x 

20-3200V

↔  
25 cm.

CE

EN ISO 11611:2003  
CLAUSE 6.6  
TÜV AK 60013119 0001  
TÜV 21120493 001



## ACCESSORIES

### 44-3006LB, 44-3006LB/PR





- High heat reflective handshield
- Split cowhide leather and **aluminized PFR back**
- Also available in pairs (44-3006LB/PR)



EN 532  
TÜV 744-800515/25

KEVLAR® 5 ply 



### 44-3008LB





- High heat reflective handshield
- Split cowhide leather and **fiber glass back**
- Extra heat resistant



EN 532  
TÜV 744-800515/25

KEVLAR® 5 ply 



### 44-3009BF





- High heat reflective handshield
- **Fiber glass and backside of black coated fiber glass**
- Heavy duty handshield for the toughest applications



EN 532  
TÜV 744-800515/25

KEVLAR® 5 ply 



### 10-1099



- TIG finger
- For extra protection
- For extra stability in position welding
- Silica fabric
- With hook and loop

KEVLAR® 3 ply 






**ACCESSORIES**



**44-7900**

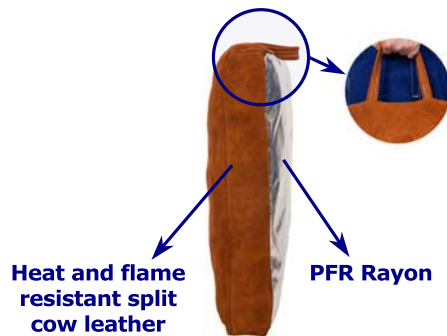


- 50 x 50 x 8 cm.  
- KEVLAR<sup>®</sup> 3 ply

**44-7920**



- 50 x 50 x 8 cm.  
- KEVLAR<sup>®</sup> 3 ply

**44-7910**

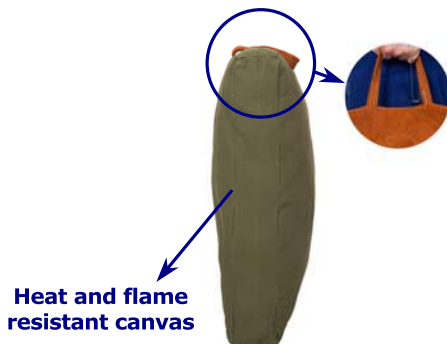

- 50 x 50 x 8 cm.  
- KEVLAR<sup>®</sup> 3 ply

## ACCESSORIES

44-7111



- Foldable inspector mask
- Fits glass: 110 x 50 mm.
- Glass not included

KEVLAR® 3 ply



↔ 29 cm.    ↕ 27 cm.



↔ 16 cm.    ↕ 9 cm.

44-7110



- Electrode bag with hanging system
- To be filled with max. 2 kg. electrodes
- Double leather construction

KEVLAR® 3 ply

↔ 8 cm.    ↕ 38 cm.

## ▼ GRAIN LEATHER HELMET CAPS AND BIBS ▼

44-7180

44-7181

44-7182



Helmet cap



Back neck protection



Front neck protection



**PYTHONrap**<sup>™</sup> **CABLE COVERS**

**V = Hook and loop**

**T = Tube**

**Z = Zipper**



**Light brown cowhide**

**Grain black cowhide**

**Black flame retardant nylon**



KEVLAR<sup>®</sup> 3 ply

Available in many length / diameter combinations

**LAVAsield**<sup>®</sup>

**WELDING BLANKETS**

**50-1866**

**50-2368/2468**

**50-3068**




- Silica fabric
- 174 x 174 cm.
- 1260°C
- 600 gr./m<sup>2</sup>
- KEVLAR<sup>®</sup> 3 ply

- Black fiberglass
- Neoprene / neoprene coating
- 174 x 234 cm.
- 538°C
- 800 gr./m<sup>2</sup>
- KEVLAR<sup>®</sup> 3 ply

- Gold fiberglass
- Acryl / neoprene coating
- 174 x 234 cm.
- 538°C
- 1000 gr./m<sup>2</sup>
- KEVLAR<sup>®</sup> 3 ply

## LAVAsield<sup>®</sup> WELDING SCREENS

### 55-6166, 55-6168 Orange/Red



55-6166 1.8 x 1.8 mtr.  
55-6168 1.8 x 2.4 mtr.


- Heat sealed seams and grommets
- Nylon ties are furnished for convenience and secure fastening to the quick connection Weldas frame: 55-8668

 55-6166: 28 pcs. plastic grommets  
55-6168: 32 pcs. plastic grommets




LAVAsield<sup>®</sup>

EN 1598 : 2011  
ECS: 00101-ECS-13



### 55-7166, 55-7168 Green



55-7166 1.8 x 1.8 mtr.  
55-7168 1.8 x 2.4 mtr.

- Heat sealed seams and grommets
- Nylon ties are furnished for convenience and secure fastening to the quick connection Weldas frame: 55-8668

 55-7166: 28 pcs. plastic grommets  
55-7168: 32 pcs. plastic grommets




LAVAsield<sup>®</sup>

EN 1598 : 2011  
ECS: 00102-ECS-13



## COMBOframe<sup>™</sup> MODULAR FRAME

### 55-8668

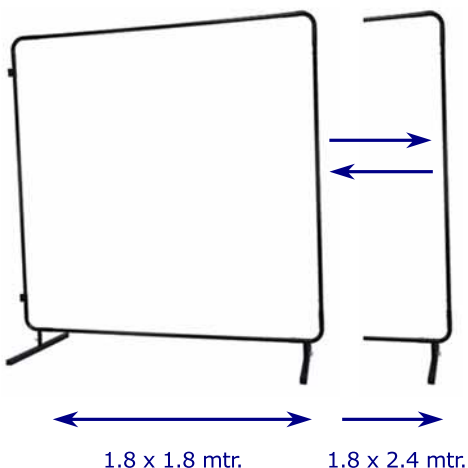

55-8668 1.8 x 1.8 mtr. / 1.8 x 2.4 mtr.

- Weldas COMBOframe<sup>™</sup> suitable for the welding screens: 55-6166, 55-6168, 55-7166, 55-7168
- Will be delivered as only frame (incl. swivelset), without screens

COMBOframe<sup>™</sup>



## LAVAsield® ECONO WELDING SCREENS

### 55-6166/Eco-screen Orange/Red



55-6166/Eco-screen 1.37 x 1.7 mtr.

- Heat sealed seams
- Screen suitable for Weldas econo modular frame: 55-8170

LAVAsield®

EN 1598 : 2011  
ECS: 00101-ECS-13



### 55-7166/Eco-screen Green



55-7166/Eco-screen 1.37 x 1.7 mtr.

- Heat sealed seams
- Screen suitable for Weldas econo modular frame: 55-8170


LAVAsield®

EN 1598 : 2011  
ECS: 00102-ECS-13



## COMBOframe™ ECONO MODULAR FRAME

### 55-8170



55-8170 1.37 x 1.7 mtr.

- Weldas econo modular frame suitable for the Weldas econo welding screens: 55-6166/Eco-screen, 55-7166/Eco-screen
- Will be delivered as only frame (incl. swivelset), without screens



## LAVAsield® ECONO STRIP SCREENS

### 55-6166/Strip, 55-7166/Strip



55-6166/Strip 0.68 x 1.8 mtr. Orange / Red

EN 1598 : 2011  
ECS: 00101-ECS-13



Incl. 5 rings (Ø 50 mm.)



EN 1598 : 2011  
ECS: 00102-ECS-13

55-7166/Strip 0.68 x 1.8 mtr. Green



## SELECTION CRITERIA

Weldas offers a variety of materials, designs, construction patterns, and sizing to suit different needs and applications. Our products are tested for these factors according to the appropriate EN standards and certified by TÜV of Germany.

Choosing the right product is always important in making the workplace safe and productive. The factors to consider include one or more of the following.

### PROTECTION

Resistance to heat, flame, molten metal splash, UV, electricity, cuts and punctures.

### DURABILITY

Abrasion resistance, tensile strength, tear resistance, heat related dimensional change resistance, reinforced seams and stress points, as well as thread strength and flame resistance.

### COMFORT

Sizing, fit, dexterity, fingertip sensitivity, weight, sweat vapor transmission and absorption, and climate and oil resistance

### HEALTH


pH values, Chromium (VI), and pentachlorophenol (PCP) found in the product materials are within safe health levels.

The following is a general set of guidelines to assist you in your selection:

CHOICE OF LEATHER	
TYPE	FEATURES
Grain Deer Skin	Fit & Dexterity
Grain Goat Skin	Fit & Light Weight
Grain Cowhide	Pliable & Strong
Grain Pig Skin	Oil & Abrasion Resistant
Split Cowhide	Heat & Flame Resistant

CHOICE OF LINING	
TYPE	FEATURES
Cotton	Comfort, Price
COMFOflex®	Highest Level of Comfort, Moderate Heat Resistance
Wool & COMFOflex®	Highest Level of Heat Resistance, Comfort

### LEATHER GRADES AND TERMINOLOGY

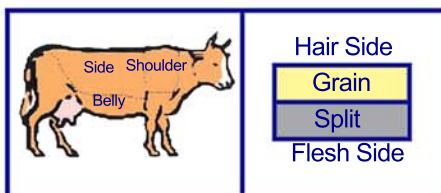

The skin of an animal is tanned in order to have usable leather for gloves, clothing and other products.

One recognizes leather in 3 types:

- **Grain leather:** smooth, pliable and water resistant;
- **Suede leather:** a mildly rough leather;
- **Split leather:** a rough to very rough leather.

The outer layer of leather (the hairside) is the 'grain' leather.

The grain leather has a smooth side and a smooth or, mostly, split or suede side.

The lower layers are, mostly, split leather on both sides.

Split leather is available in 3 qualities:

A, B and C grade.

Weldas Europe only uses the A and B grade in order to satisfy the quality needs of the customer.

### CHOICE OF THUMB DESIGN



Straight thumb for finger tip sensitivity



Wing thumb for seamless palm durability



Keystone thumb for comfortable fit

## EUROPEAN NORM & GUIDELINE EXPLANATION

### INTRODUCING CE

In 1989, the Council of European Communities established directive 89/686/EEC which requires employers to use appropriate personal protective equipment (PPE). All protective gloves and clothing must be marked with appropriate CE markings according to its intended use.

#### Level 1

Simple product design for minimal risk and for applications below 50°C. Only self-certified and "CE Minimal Risk" markings allowed.

#### Level 2

Complex product design for industrial environments with heat, flame or mechanical risks.


**Products must be tested, certified and marked to appropriate EN standards.**

#### Level 3

In addition to level 2, an audited manufacturing quality assurance system is required.



Example of imprint of a Weldas certified glove:

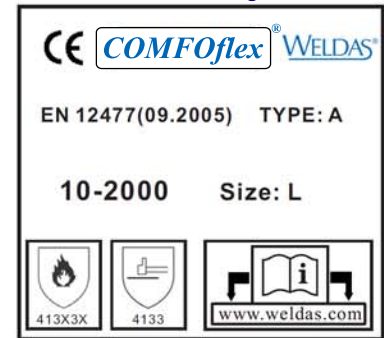

### Personal protection products for welding must have the right certification!

EN 388: Protective gloves against mechanical risk

Digit	Test Resistance	Level 1	Level 2	Level 3	Level 4	Level 5
1st	Abrasion (# cycles)	100	500	2000	8000	-
2nd	Blade Cut (index)	1.2	2.5	5.0	10.0	20.0
3rd	Tear (Newton)	10	25	50	75	-
4th	Puncture (Newton)	20	60	100	150	-



EN 407: Protective gloves against thermal risk

Digit	Test Resistance	Digit	Test Resistance
1st	Burning Behaviour	4th	Radiant Heat
2nd	Contact Heat	5th	Small Splash of Molten Metal
3rd	Convective Heat	6th	Large Quantity of Molten Splash



EN 420: Glove and hand size reference

Hand Size Index	7 1/2	8 1/2	9	9 1/2	10 1/2
Weldas Size Label	S	M	L	XL	XXL
Measurement mm	190	216	229	241	267

Weldas sizing incorporates EN420 size standards, the lining and the intended use.



EN 11611: Protective clothing for use in welding and allied processes

Subclause	Requirement	Class 1	Class 2
6.1	Tensile strength - woven outer textile material - leather	400 N 80 N	400 N 80 N
6.2	Tear strength	20 N	20 N
6.3	Burst strength	200 kPa	200 kPa
6.4	Seam strength - textile material - leather	225 N 110 N	225 N 110 N
6.5	Dimensional change of woven textile materials Dimensional change of knitted textile materials	≤ ± 3 % ≤ ± 5 %	≤ ± 3 % ≤ ± 5 %
6.6	Requirements for leather: fat content	≤ 15 %	≤ 15 %
6.7	Flame spread	ISO 15025:2000, Procedure A (surface ignition) ISO 15025:2000, Procedure B (edge ignition) No flaming to the top or either side edge No hole formation <sup>a</sup> No flaming or molten debris Mean afterflame ≤ 2 s Mean afterglow ≤ 2 s	ISO 15025:2000, Procedure A (surface ignition) ISO 15025:2000, Procedure B (edge ignition) No flaming to the top or either side edge No hole formation <sup>a</sup> No flaming or molten debris Mean afterflame ≤ 2 s Mean afterglow ≤ 2 s
6.8	Impact of spatter	15 drops	25 drops
6.9	Heat transfer (radiation)	RHTI 24 ≥ 7	RHTI 24 ≥ 16
6.10	Electrical resistance	> 10 <sup>5</sup> Ω	> 10 <sup>5</sup> Ω
6.11	Innocuousness	See 6.11	See 6.11

<sup>a</sup> For ISO 15025:2000, Procedure B, this requirement is not applicable.

EN 12477: Protective gloves for welders (minimum requirements)

Requirements	EN	Type A Minimum Rating	Type B Minimum Rating
Electrical Insulation	EN1149-2	R≥10 <sup>5</sup> Ω	R≥10 <sup>5</sup> Ω
Abrasion Resistance	EN388	2 500 (cycles)	1 100 (cycles)
Blade Cut Resistance	EN388	1 Index 1.2	1 Index 1.2
Tear Resistance	EN388	2 25 N	1 10 N
Puncture Resistance	EN388	2 60 N	1 20 N
Burning Behaviour	EN407	3	2
Contact Heat Resistance	EN407	1 100 °C	1 100 °C
Convective Heat Resistance	EN407	2 HTI≥7	0 0
Small Molten Splash Resistance	EN407	3 25 Droplets	2 15 Droplets
Dexterity (pick up of rod dia.)	EN420	1 ≤11mm	4 ≤6.5mm

See for all certificates, testreports, manuals and declarations of conformity:

**WWW.WELDAS-CE.COM**

## MANUFACTURER:



## TESTING AND CERTIFICATION PARTNERS



TÜV Rheinland®



WWW.WELDAS-CE.COM

**Weldas Europe B.V.**  
**Blankenweg 18**  
**NL-4612 RC Bergen op Zoom**  
**Holland**

**Tel.: +31 164 27 46 50**  
**Fax: +31 164 27 46 55**  
**europa@weldas.com**  
**www.weldas.com**

KEVLAR is a registered trademark of E.I. DuPont Co.  
Weldas is a registered trademark of Weldas Company  
COMFOflex is a registered trademark of Weldas Co.  
DEERSOsoft is a registered trademark of Weldas Co.  
LAVAshield is a registered trademark of Weldas Co.  
STEERSOtuff is a registered trademark of Weldas Co.  
SWEATSOpad is a registered trademark of Weldas Co.  
TURMOflex is a registered trademark of Weldas Co.  
Yellowjacket is a registered trademark of Weldas Co.  
COMBOframe is a trademark of Weldas Co.  
Fire Fox is a trademark of Weldas Co.  
Golden Brown is a trademark of Weldas Co.  
Lava Brown is a trademark of Weldas Co.  
PYTHONrap is a trademark of Weldas Co.  
SOFTouch is a trademark of Weldas Co.  
ThunderingBison is a trademark of Weldas Co.

## YOUR DISTRIBUTOR:

